

INSTRUCTIONS

AC adaptor

Before installing and using the unit, please read these instruction carefully. Be sure to keep it handy for later reference.

Before using this unit, please check all the connected devices power supply specifications. Depending on the type of connected devices, this unit may not operate properly.

■ CONNECTIONS

- 1 Connect the power output cable (+, -) from the AC adaptor to the DC input terminals on the camera.

NOTE: Be sure to carefully check the polarity of the power output cable in order to make the proper connections. (Please refer to the illustration on the rating label.)

- 2 Insert the plug of this power supply into a wall outlet.


When finished

Unplug the AC adaptor from the wall outlet, then disconnect the power output cable from the camera.

■ SPECIFICATIONS

Input voltage	: AC 220 ~ 230 V, 50 Hz
Power output	: DC 15 V 600 mA
Power consumption	: 17 VA max.
Operating environment temperature	: -10°C to 50°C
Dimensions	: 68 (W) x 62 (H) x 100 (D) mm
Weight	: Approx. 680 g

■ DIMENSIONS: mm

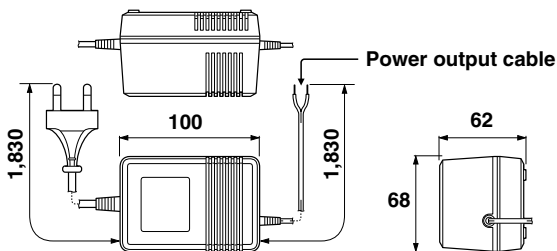

Features and specifications are subject to change without prior notice or obligations.

■ PRECAUTIONS

In case of problem

Do not use the unit if smoke or a strange odour comes from the unit, or if it seems not to function correctly. Disconnect the power cord immediately, and consult your dealer (or a Sanyo Authorized Service Centre).

Do not open or modify

Do not open the cabinet, as it may be dangerous and cause damage to the unit. For internal settings and repairs, consult your dealer (or a Sanyo Authorized Service Centre).

Do not put objects inside the unit

Make sure that no metal objects or flammable substance get inside the unit. If used with a foreign object inside, it could cause a fire, short-circuits or damages.

If water or a liquid gets inside the unit, disconnect the power cord immediately, and consult your dealer (or a Sanyo Authorized Service Centre). Be careful to protect the unit from rain, sea water, etc.

Be careful when handling the unit

To prevent damages, do not drop the unit or subject it to strong shock or vibration.

Protect from humidity and dust

To prevent damages to the unit, do not install it where there is greasy smoke or steam, where the dampness may get too high, or where there is a lot of dust.

Protect from high temperatures

Do not install close to stoves, or other heat generating devices, such as spotlights, etc., or where it could be subject to direct sunlight, as that could cause deformation, discoloration or other damages.

Be careful when installing close to the ceiling, in a kitchen or boiler room, as the temperature may raise to high levels.

Install where the temperature range will stay between -10°C and 50°C. (no condensation)

Cleaning

- Dirt can be removed from the cabinet by wiping it with a soft cloth. To remove stains, wipe with a soft cloth moistened with a soft detergent solution and wrung dry, then wipe dry with a dry soft cloth.
- Do not use benzene, thinner or other chemical product on the cabinet, as that may cause deformation and paint peeling. Before using a chemical cloth, make sure to read all accompanying instructions. Make sure that no plastic or rubber material comes in contact with the cabinet for a long period of time, as that may cause damage or paint peeling.